


Dual Slot Resonance (DSR) Linac

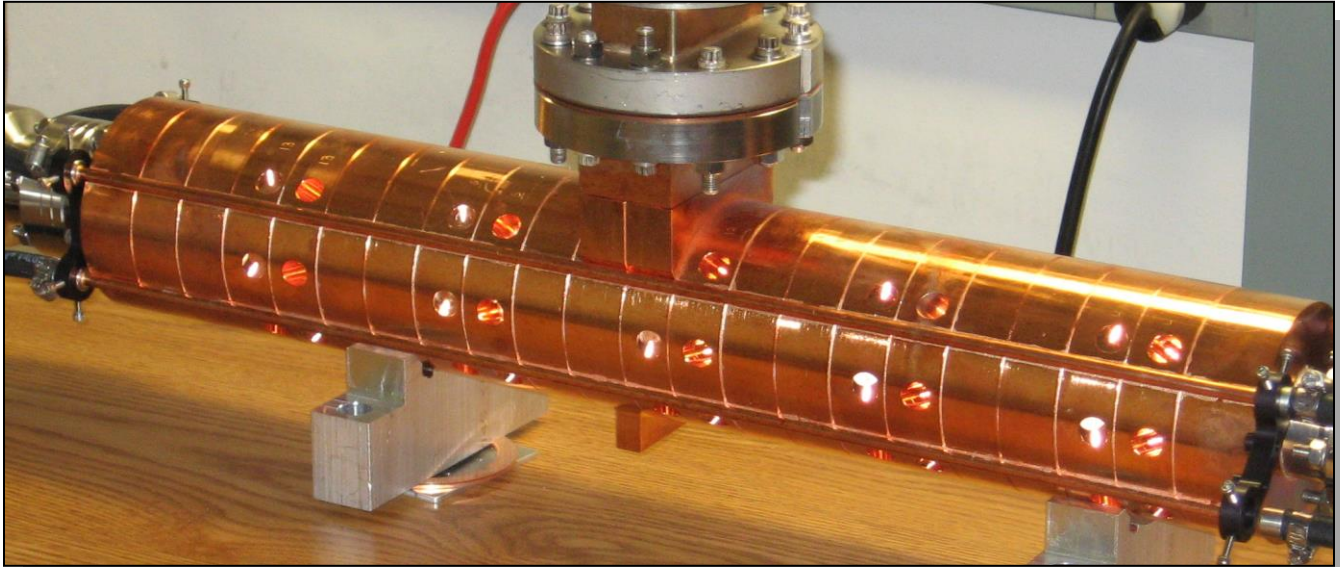

Specifications:

- Operating frequency: 2856 MHz
- Shunt Impedance: 85 M Ω /m
- Length, flange to flange: 66.5 cm
- Beam clear aperture diameter: 8 mm
- Energy Gain: 10 MeV

Features:

- Compact electron linac
- Can accommodate compact solenoids
- Suitable for medical/industrial and research applications



San Diego, California 92121

Phone: (858) 455-6655 • Fax: (858) 450-9741 • www.far-tech.com • support@far-tech.com